


NOTE: Chip card type S is required!

Prepare disinfectant: (if not already prepared).

This disinfectant is for cleaning of all external parts that are exposed to blood.

- 1. Wipe the lower tube holder of the needle unit.
- 2. Wipe the stainless steel drip plates below the pipette carousel and needle unit.



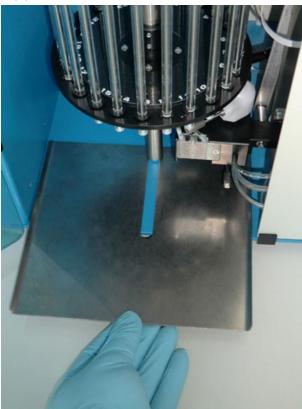

- 3. In the Main menu use the function [$END_OF_DAY\ WASH$] .
- 4. Check the system for leakage.
- Inspect sample needle condition:
 Menu Service Motor control Needle M31 Press [ARROW DOWN] twice to expose the needle tips. If
 the tips are worn, replace the needle.
- 6. Check sensors:

Menu Service - Next - Sensor Status Blood sensor: value 110-160 Measure head: value 40-60